

**FUJI CO., LTD**

1F, NO.32, JIANGUO N. RD., JUNGLI CITY.TAOYUAN, TAIWAN 320, R.O.C.

TEL : 886-3-425-4927

FAX : 886-3-426-9652

# **SPECIFICATION**

**P/N: Alva-AH350-10**

## FUJI CO., LTD

1F, NO.32, JIANGUO N. RD., JUNGLI CITY.TAOYUAN, TAIWAN 320, R.O.C.

TEL : 886-3-425-4927

FAX : 886-3-426-9652

### Without housing



### With housing



### Benefits

- Light weight
- Enhance the value of your products
- Provides flexibility to designers
- Support all LEDs
- It is a hazard free product
- It can be integrated in practically any LED lighting system
- Facilitates new fixture design
- Facilitates low profile fixture design
- No binning of LEDs results in cost savings
- Allows use in any indoor and outdoor applications
- Drivers last as long as LEDs
- Optimisation of the usage of the system power

### Description

The Alva-AH350-10 Constant Current Output drivers provide the 350mA constant DC current output required to enhance the long life and optimum operation of high brightness LEDs.

The Alva-AH350-10 is included in the Alva family, which covers all high power LED drivers.

*The Alva family have Alva-ADH20, Alva-AH350, Alva-AH700, Alva-ADL350A, Alva-DL350A and other customized CCDs such as Alva-AH1050 and Alva-AH1400.*

*Other input, output, voltage, current, sizes and layout are available on request.*

### Features

- Small/Compact size
- DC constant current output
- Power Efficiency
- Reliability
- Can be integrated into any LED lighting system
- Compliant with all colours of standard and custom high power light sources

### Typical Applications

- Reading lights (Desk)
- MR-16
- Architectural lighting
- Garden lighting
- Rough service lighting
- Display Cases
- Marker & Orientation lights
- Reading lamps/Task light/table lamps
- Cove lighting
- Cornice lighting
- Landscape lighting
- Refrigeration
- Vending machine lighting
- Wall sconces
- Under-cabinet lighting
- Spots Lights
- Signalling
- Fibre Optic systems
- Point of Sale

## FUJI CO., LTD

1F, NO.32, JIANGUO N. RD., JUNGLI CITY.TAOYUAN, TAIWAN 320, R.O.C.

TEL : 886-3-425-4927

FAX : 886-3-426-9652

### ➤ Signage

#### Selection Guide

Part Number	Description
Alva-AH350-10	85~264VAC/ 10W/350mA Alva LED Driver

Note:

1. The output power is typically 10W but may exceed 10W conditionally. (Contact our engineer for the detail)

#### Electrical characteristics

##### Input

Parameter	Min	Max
Input Voltage Range	85Vac	264Vac
Input Frequency	47Hz	63Hz
Input Current	N/A	2.0A-115Vac/60Hz
Efficiency		Typical 80%~85%

##### Output

Parameter	Min	Max
Output Current	350mA+/-10%	
Output Voltage Range	3.0Vdc	28.0Vdc

Notes:

1. Electrical characteristics at 25 ambient temperature.
2. Power factor > 0.5
3. Maximum driving power : 10W rms .
4. Build -in protection circuit : Short circuit, Overload protection, Thermal protection.
5. Protection class : Class II.

#### Environmental Ratings

Parameter	Min	Max
Operating Ambient Temperature	-10	50
Storage Ambient Temperature	-20	80

#### Driver wiring Diagram

**Important:** Please contact our engineer to ensure installation and maintenance being properly executed to obtain maximum performance, efficiency and durability from the LED lighting product.

**Disclaimer:** While every care has been taken with the details on this specification sheet, we accept no responsibility for any inaccuracies and reserves the right to change these specifications without notice to always ensure that you are receiving a superior product.


**Dimension :** 81.5(L)\*47(W)\*24(H) mm

Note: the dimension, shape and layout can be customized in order to fit your mechanical design.



**Configuration arrays when using 1W LEDs with Alva Drivers:**

**With the 350mA Output Current Alva:**

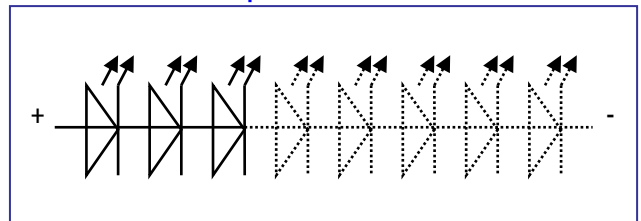

To drive at 350mA/LED: from 1 to 10 LEDs in series

Notes:

1. The number of LEDs in series depends on the forward voltage, Vf, of the LEDs, and may be more than 10 LEDs in series conditionally. (Contact our engineer for the detail)
2. The R, G, B and other colour LEDs can be mixed in series.