

Alva-ADL700-08 LED Electronic Driver

700mA Constant Current Output



Description

The Alva-ADL700-08 Constant Current Output drivers provide the 700mA constant DC current output required to enhance the long life and optimum operation of high brightness LEDs.

The Alva-ADL700-08 is included in the Alva family, which covers all high power LED drivers.

The Alva family have Alva-ADH20, Alva-AH350, Alva-AH700, Alva-ADL350-08, Alva-ADL350, Alva-DL350A, Alva-DL350-08, Alva-DL700-08 and other customized CCDs such as Alva-AH1050 and Alva-AH1400.

Features

- Small/Compact size
- DC constant current output
- Power Efficiency
- Reliability
- Short and open circuit protected
- Fully isolated output
- Can be integrated into any LED lighting system
- Compliant with all colours of standard and custom high power light sources

Benefits

- Light weight
- Enhance the value of your products
- Provides flexibility to designers
- Support all LEDs
- It is a hazard free product
- It can be integrated in practically any LED lighting system
- Facilitates new fixture design
- Facilitates low profile fixture design
- No binning of LEDs results in cost savings
- Allows use in any indoor and outdoor applications
- Drivers last as long as LEDs
- Optimisation of the usage of the system power

Typical Applications

- Reading lights (Desk, Car, bus)
- Torch (Flash light)
- MR-16
- Portable (Car, bicycle, Motorcycle)
- Architectural lighting
- Garden lighting
- Garden lighting with solar system
- Marker & Orientation lights
- Cove lighting
- Cornice lighting
- Landscape lighting
- Refrigeration
- Vending machine lighting
- Wall sconces
- Under-cabinet lighting
- Spots Lights
- Signalling
- Fibre Optic systems
- Point of Sale
- Signage

| Selection Guide | |
|-----------------|---------------------------------------|
| Part Number | Description |
| Alva-ADL700-08 | 12-28Vac/Vdc/8W/700mA Alva LED Driver |

FUJI CO., LTD

1F, NO.32, JIANGUO N. RD., JUNGLI CITY.TAOYUAN, TAIWAN 320, R.O.C.
 TEL : 886-3-425-4927
 FAX : 886-3-426-9652

Alva-ADL700-08 LED Electronic Driver

700mA Constant Current Output

Note:

- The output power is typically 1W-8W but may exceed 8W conditionally. (Contact our engineer for the detail)

Electrical characteristics

Input

| Parameter | Min | Max |
|---------------------|-----------|-----------|
| Input Voltage Range | 12Vac/Vdc | 28Vac/Vdc |
| Efficiency | 70% | 90% |

Output

| Parameter | Min | Max |
|----------------------|--------|-------|
| Output Current | 315mA | 385mA |
| Output Voltage Range | 2.2Vdc | 28Vdc |

Notes:

- Electrical characteristics at 25 ambient temperature.

Environmental Ratings


| Parameter | Min | Max |
|-----------|-----|-----|
|-----------|-----|-----|

Driver wiring Diagram


Dimension : 18.3 mm (L) x 12.7mm (W)

Note: the dimension, shape and layout can be customized in order to fit your mechanical design.

#1 AC input:

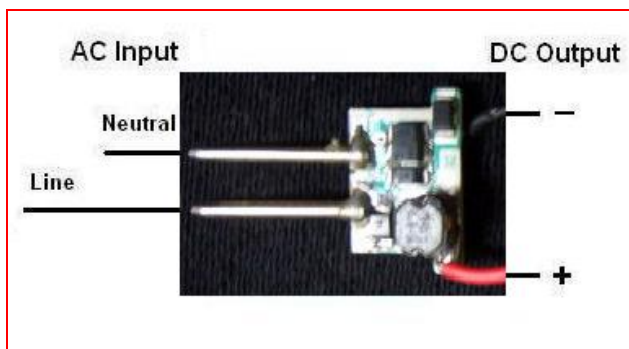

#2 DC input:

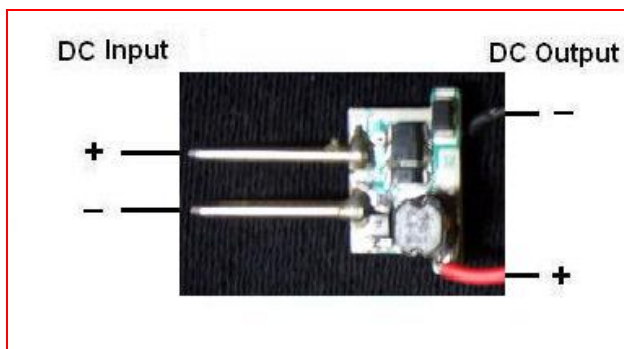


Important: Please contact our engineer to ensure installation and maintenance being properly executed to obtain maximum performance, efficiency and durability from the LED lighting product.

Disclaimer: While every care has been taken with the details on this specification sheet, we accept no responsibility for any inaccuracies and reserve the right to change these specifications without notice to always ensure that you are receiving a superior product.

| | | |
|-------------------------------|-----|-----|
| Operating Ambient Temperature | -40 | 125 |
| Storage Ambient Temperature | -55 | 150 |

Configuration arrays when using LEDs with Alva Drivers:
With the 700mA Output Current Alva:

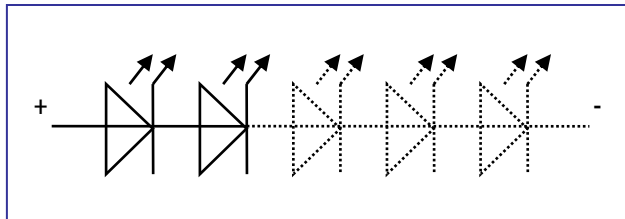

To drive at 700mA/LED: from 1 to 8 LEDs in series

Notes:

- The number of LEDs in series depends on the forward voltage, V_f , of the LEDs, and may be more than 8 LEDs in series conditionally. (Contact our engineer for the detail)
- The R, G, B and other colour LEDs can be mixed in series.

FUJI CO., LTD

1F, NO.32, JIANGUO N. RD., JUNGLI CITY.TAOYUAN, TAIWAN 320, R.O.C.

TEL : 886-3-425-4927

FAX : 886-3-426-9652