

FUJI CO., LTD

1F, NO.32, JIANGUO N. RD., JUNGLI CITY.TAOYUAN, TAIWAN 320, R.O.C.

TEL : 886-3-425-4927

FAX : 886-3-426-9652

SPECIFICATION



P/N: LCT-200BW-M2-A-CC



+



Examples: Diameter=90mm ; Height=35



=>



=>



FUJI CO., LTD

1F, NO.32, JIANGUO N. RD., JUNGLI CITY.TAOYUAN, TAIWAN 320, R.O.C.

TEL : 886-3-425-4927

FAX : 886-3-426-9652



Indoor lighting application:

Description

The **LCT-200BW-M2-A-CC** is a Talent LED Module. It is integrated by modular LED array of **20W** high power LEDs and ALVA CCD power supply. This product line provides simple and compact solution for traditional lighting in different size fitted into existing fixture. *The size including LED PCB and CCD power supply, the LEDs, the colour pattern, the array layout and the CCD driver layout are opened for being customized to meet the requirement of the existing fixture.*

Features

- The heat is efficiently managed at preferable working temperature.
- Small/Compact size.
- Easy for being retrofitted into existing traditional lighting fixture

Benefits

- Have flexible configurations including Warm white, White, Red, Green, Blue, Yellow and RGB mixed and other customized configuration.
- Light weight
- Enhance the value of your products
- Provides flexibility to designers
- Support 1W, 3W and 5W LEDs.

- It is a hazard free product
- It can be integrated into existing lighting system
- Facilitates new fixture design
- Facilitates low profile fixture design
- Optimisation of the usage of the system power.

Typical Applications

- Architectural lighting
- Indoor lighting
- Ceiling lighting

Selection Guide	
Part Number	Description
LCT-200BW-M2-A-CC-20WW	20W warm White/Universal Input
LCT-200BW-M2-A-CC-20SW	20W Sun White/Universal Input
LCT-200BW-M2-A-CC-20R	20W Red/Universal Input
LCT-200BW-M2-A-CC-20G	20W Green/Universal Input
LCT-200BW-M2-A-CC-20B	20W Blue/Universal Input
LCT-200BW-M2-A-CC-20Y	20W Yellow/Universal Input
LCT-200BW-M2-A-CC-20M	20W RGB/Universal Input
LCT-200BW-M2-A-CC-XXX	Customized

Note: The **XXX** is the project code of the customized products.

Electrical characteristics		
Input		
Parameter	Min	Max
Input Voltage Range	85Vac	264Vac
Input Frequency	47Hz	63Hz
Input Current	N/A	2.0A-115Vac/60Hz
Efficiency	Typical 80%-85%	

Environmental Ratings		
Parameter	Min	Max
Operating Ambient Temperature	-10	60
Storage Ambient Temperature	-20	80

FUJI CO., LTD


1F, NO.32, JIANGUO N. RD., JUNGLI CITY.TAOYUAN, TAIWAN 320, R.O.C.

TEL : 886-3-425-4927


FAX : 886-3-426-9652

Drawing and Diagram

1. Alva CCD LED Driver. 60mm (L) x 35mm(W) x 30mm(H)

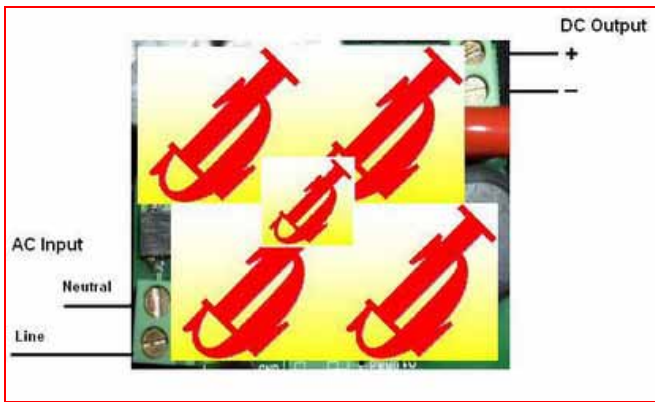

2. LED Module. 90mm(D) x 35mm(H)

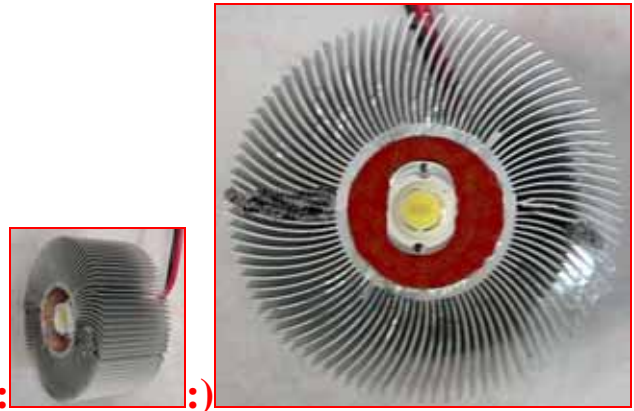

Indoor Applications:



Important: Please contact our engineer to ensure installation and maintenance being properly executed to obtain maximum performance, efficiency and durability from the LED lighting product.

Disclaimer: While every care has been taken with the details on this specification sheet, we accept no responsibility for any inaccuracies and reserve the right to change these specifications without notice to always ensure that you are receiving a superior product.